
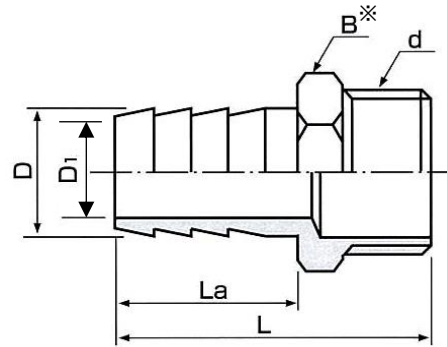


EA141A-101~148

[ステンレス製]雄ねじシステム

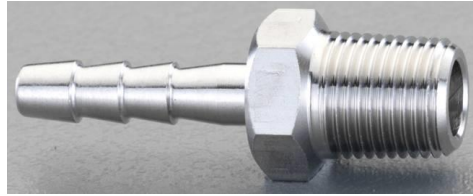

- 材質 ... SUS304
- 使用圧力 ... 3.45MPa以下
- 使用温度 ... -50°C~150°C

※B=六角対辺

品番	ねじサイズ d(PT)	タケノコ径 D(mm)	サイズ(mm)				重量 (g)
			タケノコ 内径D1	B*	La	L	
EA141A-101	1/8"	5.0	3.0	12	20	36	9.5
EA141A-102		6.0	3.0				10.8
EA141A-103		6.5	3.0				11.5
EA141A-104		7.0	4.0				11.2
EA141A-105		8.0	5.0				11.4
EA141A-106		9.0	5.5				12.8
EA141A-107		10.5	6.0				15.2
EA141A-108		1/4"	6.0				3.0
EA141A-109	6.5		3.0	14	18.2		
EA141A-110	7.0		4.0	14	17.4		
EA141A-111	8.0		5.0	14	18.0		
EA141A-112	9.0		5.0	14	20.0		
EA141A-113	10.5		6.0	14	22.0		
EA141A-114	12.0		8.0	14	21.3		
EA141A-115	13.0		8.0	14	25.0		
EA141A-116	14.0		8.0	17	32.7		
EA141A-117	3/8"		6.0	3.0	17	25	44
EA141A-118		6.5	3.0	25.4			
EA141A-119		7.0	4.0	25.0			
EA141A-120		8.0	5.0	26.0			
EA141A-121		9.0	6.0	26.0			
EA141A-122		10.5	6.0	30.5			
EA141A-123		12.0	8.0	29.7			
EA141A-124		13.5	8.0	35.6			
EA141A-125		14.0	9.0	34.0			
EA141A-126		16.0	11.0	35.0			

ver.1.1

※B=六角対辺

品番	ねじサイズ d(PT)	タケノコ径 D(mm)	サイズ(mm)				重量 (g)
			タケノコ 内径D1	B*	La	L	
EA141A-127	1/2"	6.0	3	22	27	49	41.5
EA141A-128		7.0	4				42.5
EA141A-129		8.0	5				42.5
EA141A-130		9.0	6				43.0
EA141A-131		10.5	7				45.5
EA141A-132		12.0	8				47.8
EA141A-133		12.7	8				51.0
EA141A-134		13.5	10				46.6
EA141A-135		14.0	11				44.7
EA141A-136		16.0	12				49.3
EA141A-137	19.0	14	56.0				
EA141A-138	20.5	15	57.0				
EA141A-139	21.0	15	60.0				
EA141A-140	3/4"	16.0	11	27	33	59	81.0
EA141A-141		19.0	14	27			83.0
EA141A-142		20.5	15	27			86.0
EA141A-143		21.0	16	27			82.6
EA141A-144		26.0	20	27			92.0
EA141A-145		27.0	20	29			109.0
EA141A-146	1"	20.5	15	35	40	70	156.0
EA141A-147		27.0	22				152.5
EA141A-148		34.0	25				210.0

23.Nov.