

WESCO[®]

Industrial Products, LLC

#273108 Pail Tipper Assembly Procedure

Attention: To insure proper assembly and operation of your Wesco Pail Tipper, read and follow these instructions before using.

Specifications

The Wesco Pail Tipper is designed for dispensing 5 - gallon plastic or steel pails. Variable height chime lock for quick loading and unloading.

Unpacking

When unpacking your Pail Tipper, check carefully for shipping damage and missing parts. If damage has occurred or any parts are missing, file a claim with the delivering carrier within 24 hours and notify the dealer from whom the Pail Tipper was purchased.

Tools Required:

- 11mm Open End Wrench
- 11mm Box Wrench

Assembly Procedure

1. Assemble cradle with 11mm hex bolts and locknuts as shown in Figure 1.
2. Slide locking arm in place and secure with thumb screw.

Operating Procedure

1. Place 5 gallon pail into cradle
2. Place locking arm on top of pail and tighten thumb screw. Locking arm prevents pail from falling out when tipped.
3. Released locking arm to remove pail.

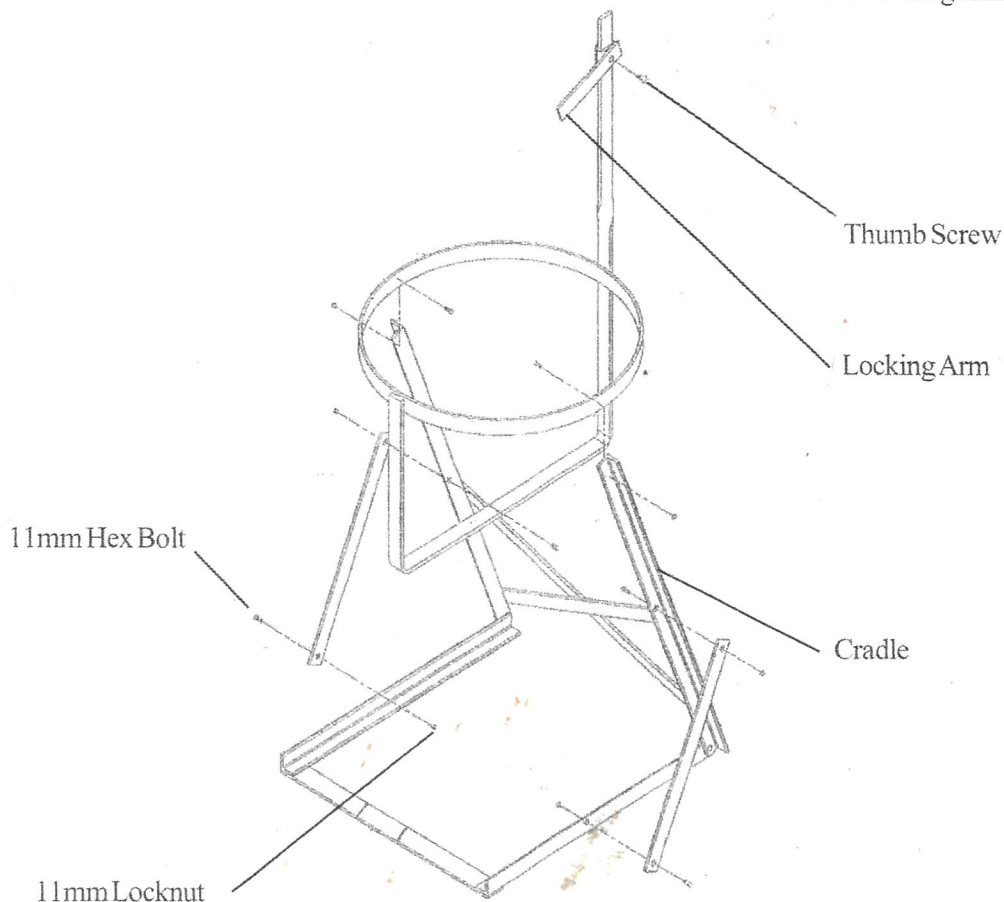


Figure 1