

LK,LS

ロックンギ キー

標準
在庫品

RHS

SUS

材質の特性
P.2231

追加加工
ネジ
カット P.2200

Original ELESA Model CT.476

eleasa




LK
(メネジ)



LK-T
(メネジ貫通)



LS
(オネジ)

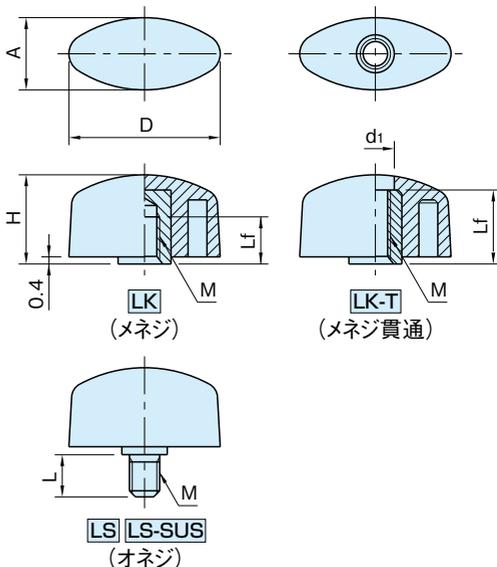

タイプ	ノブ	メネジ	オネジ
LK	ポリアミド (ガラス繊維強化) つや消しブラック	黄銅 (カドミウム低減材)	—
LK-T			—
LS	—	—	S10C 亜鉛メッキ
LS-SUS	—	—	SUS303

LK (メネジ)

EA948AC-1
EA948AC-2
EA948AC-3
EA948AC-4
EA948AC-5
EA948AC-6
EA948AC-7

品番	D	M	H	A	Lf	質量 (g)
LK 4	20	M 4×0.7	11	9.5	6	3
LK 5	26	M 5×0.8	13	11		4
LK 6	32	M 6×1	15	13	8	7
LK 8A						8
LK 8B	40	M 8×1.25	17	15.5	10	10
LK 8C	48		19	19		14
LK10A	56	M10×1.5	23	21	13	17

LK-T (メネジ貫通)

品番	D	M	H	A	Lf	d ₁	質量 (g)
LK 6T	32	M 6×1	15	13	12	6.5	7
LK 8TB	40	M 8×1.25	17	15.5	14	9	10
LK 8TC	48		19	19	16		14
LK10TA	56	M10×1.5	23	21	20	11	18

LS LS-SUS (オネジ)

スチール製		SUS製		D	M	H	A	L								
品番	質量(g)	品番	質量(g)													
LS 4×6	4	LS 4×6 -SUS	4	20	M 4×0.7	11	9.5	6								
LS 4×10		LS 4×10 -SUS						10								
LS 5×10	6	LS 5×10 -SUS	6					26	M 5×0.8	13	11	16				
LS 5×16	7	LS 5×16 -SUS	7	25												
—	—	LS 5×25 -SUS	8	10												
LS 6×10	8	LS 6×10 -SUS		16												
LS 6×16	10	LS 6×16 -SUS	10	32	M 6×1	15	13					20				
LS 6×20	11	LS 6×20 -SUS	11									25				
LS 6×25	12	LS 6×25 -SUS	12									30				
—	—	LS 6×30 -SUS	13									40				
LS 6×40	14	—	—									40	M 8×1.25	17	15.5	16
LS 8×16	13	LS 8×16 -SUS	13													25
—	—	LS 8×20 -SUS	14					40								
LS 8×25	16	LS 8×25 -SUS	16					16								
—	—	LS 8×30 -SUS	17					25								
LS 8×40	20	LS 8×40 -SUS	20					30								
LS 8×16B	15	LS 8×16B-SUS	15	40												
LS 8×25B	16	LS 8×25B-SUS	16	48												
LS 8×40B	22	LS 8×40B-SUS	22	19												
LS 8×16C	18	LS 8×16C-SUS	18	19												
LS 8×25C	21	LS 8×25C-SUS	21	25												
LS10×20	25	—	—	40	M10×1.5	17	15.5	20								
LS10×30	27	—	—					30								
LS10×40	31	—	—					40								
LS10×20A	35	LS10×20A-SUS	35	56		23	21	20								
LS10×30A	39	LS10×30A-SUS	39					30								

特長

SUS製はネジ部にSUSを用いた製品で、食品機械、衛生機器に最適です。

技術データ

使用温度 max.130℃ min.-30℃

注意事項

高温または多湿の条件下でのご使用の場合は、樹脂の材料特性を劣化させる恐れがあります。

ネジカットを承ります!



詳しくは、
P.2200