

# 高強度ステンレス

# 「SUS304CUN」





# ローヘッド六角穴付ボルト

SUS304CUN A2-100  
Low-Head Socket Cap Screw

# A2-100

NEW

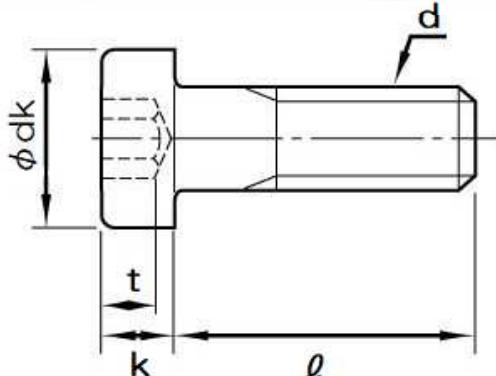

※M3及びM4は識別刻印が「..」になります

材質 SUS304CUN  
強度クラス A2-100  
引張強度 1000N/mm min  
熱処理 時効処理  
ねじ精度 JIS 6g  
表面処理 パシペート  
※破断箇所はねじ部以外も可とする

## ■ 製品仕様及び在庫寸法

呼び	ピッチ		平径		六角穴径		頭部高さ		穴深さ		在庫寸法 (l)										
	p	φ dk	s	φ dk	k	t	6	8	10	12	15	16	20	25	30	35	40	45	50		
M3	0.5	5.5	+0 -0.18	2		2	+0 -0.14	1.5			●	●	●	●	●						
M4	0.7	7		2.5	+0.100 +0.020	2.8	+0 -0.14	2.3			●	●	●	●	●	●	●				
M5	0.8	8.5	+0 -0.22	3		3.5		2.7			●	●	●	●	●	●	●				
M6	1.0	10		4	+0.140 +0.020	4	+0 -0.18	3			●	●	●	●	●	●	●				
M8	1.25	13		5		5		3.8			●	●	●	●	●	●	●				
M10	1.5	16	+0 -0.27	6	+0.175 +0.025	6		4.5			●	●	●	●	●	●	●				
M12	1.75	18		8		7	+0 -0.22	5.0							●	●	●	●	●	●	●